

EDCON-COMPONENTS



Technical Discription


Drawing

Features

- Suitable for ESD Protection
- Low Leakage current
- Low inductance and fast response
- Excellent solderability and high heat resistance for either flow or reflow soldering.

Applications

- LCD dsipace
- Optical Sensor systems
- ECU protection
- I/O protection systems

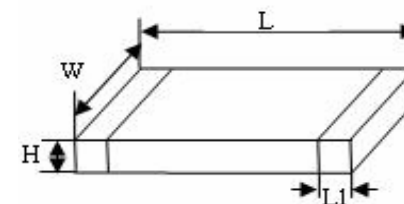

Size 0402 / Type 1005

Working Voltage	Breakdown Voltage		Clamping Voltage	Capacitance	
	at 1mA DC			at 1MHz	
DC	VB (V)	Tol. %	VC (V)	C (pf)	ΔC
5,6-26	120	± 10%	200	3	2-5%

Dimension (mm)	
L	1,00 ± 0,20
W	0,50 ± 0,20
H	0,50 ± 0,20
L1	0,20 ± 0,15

CHIP Varistor Size 0402

Part No.: **W14013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

Customer:

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Working Voltage	Tolerance Code	End-Termination	ROHS	Packing			
-------	-----------------	----------------	-----------------	------	---------	--	--	--

W14013	121	M	N	R	TR			
---------------	------------	----------	----------	----------	-----------	--	--	--


121= 120VDC	M= ±20%	N= Nickel (Standard)	R= ROHS Conform	BU= Bulk-Ware
	K= ±10%	S= Silber		
	L= ±15%		TR= Tape Reel	

CHIP Varistor Size 0402

Part No.: **W14013**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer:

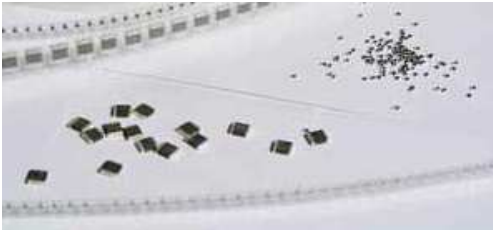

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

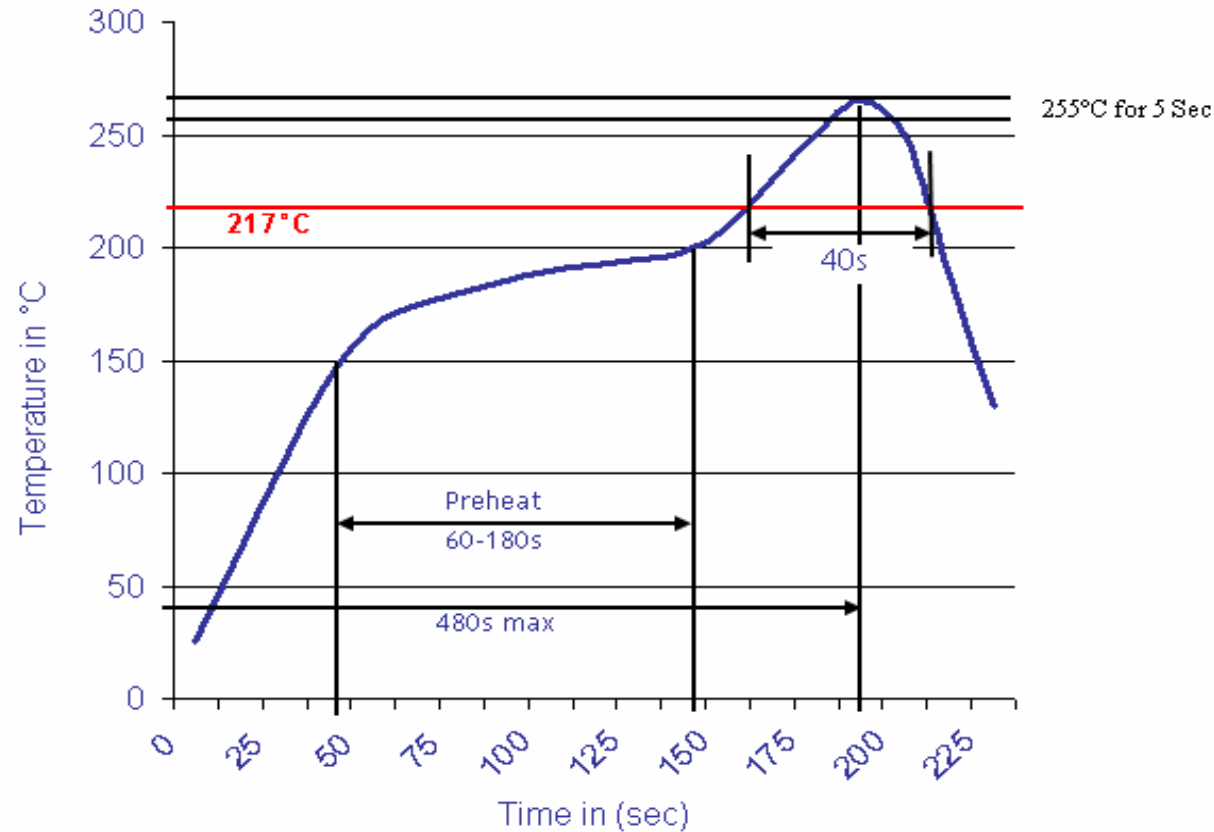

CHIP Varistor Size 0402	
Part No.:	W14013
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3