



# DATA SHEET

## Metallized polypropylene film capacitor (Box-Type)

### Serie: I37006

Code / Range **124= 0,12 $\mu$ f**

Code / Volt **162= 1600VDC**

Width **32,0 mm**

Height **22,0 mm**

Thickness **13,0 mm**

Pitch **27,5 mm**

Metallized polypropylene film  
capacitor (Box-Type)

Serie No.: **I37006**

Customer:

|       |        |      |        |        |        |           |           |          |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 15.05.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 1 from 4 |            |

# EDCON-COMPONENTS




## Features

- Metallized Polypropylen structure
- Low Loss at high frequency
- Small inherent temperature rise
- Plastic case (UL94V-0), Epoxy resin sealing

## Dimensions

### Specifications

|                             |   |
|-----------------------------|---|
| Reference Standard          | GB/T 10190 (IEC 60384-16)   |
| Climatic Category           | 40/105/21   |
| Rated Temperature           | . +85°C   |
| Operating Temperature Range | . -40°C ~ +105°C  |
|                             | (+85°C to +105°C ; decreasing factor 1,25% per °C for V <sub>R</sub> (dc))  |
| Rated Voltage               | 160Vdc(90Vac); 250Vdc(160Vac);<br>400Vdc(220Vac); 630Vdc(250Vac);<br>1000Vdc(400Vac); 1600Vdc(600Vac);<br>2000Vdc(700Vac) |
| Capacitance Range           | 0,00056µF ~ 15,0µF  |
| Capacitance Tolerance       | J=5% , K=10%, N=15%   |
| Voltage Proof               | 2000VAC ( 60s)  |
| Dissipation Factor          | ≤ 0,0020 ( 1KHz, 20°C)  |
| Insulation Resistance       | ≥ 3000s (20°C, 100V, 1Min)  |
| Pitch Width                 | from 5,0mm ~ 27,5mm   |

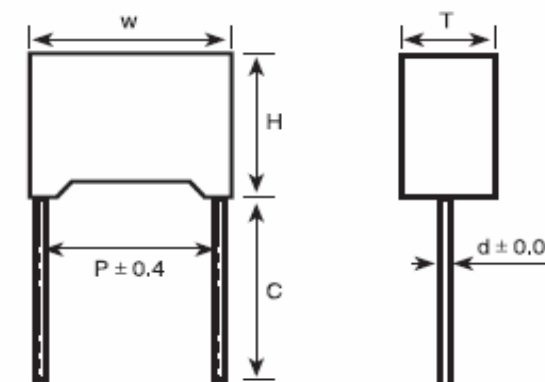

Case Dimension table

| Case Code | W ±0,4 (mm) | H ±0,4 (mm) | T ±0,4 (mm) | P (mm) |
|-----------|-------------|-------------|-------------|--------|
| <b>A</b>  | 32,0        | 22,0        | 13,0        | 27,5   |

C ±0,5 (mm)

Standard Length 18~26mm (Size by Size)

Short Lead 4,5mm

d ±0,05 (mm)

d= 0,8mm

**Metallized polypropylene film capacitor (Box-Type)**

Part No.: **I37006**

|       |        |      |        |        |        |           |           |          |            |           |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 15.05.2011 | Customer: |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 2 from 4 |            |           |

# EDCON-COMPONENTS



## Ordering Informations

| Serie | Range | Tolerance | Voltage | Case Code | Pitch Code | Lead Style | Lead Length C | ROHS | Packing Code |  |
|-------|-------|-----------|---------|-----------|------------|------------|---------------|------|--------------|--|
|-------|-------|-----------|---------|-----------|------------|------------|---------------|------|--------------|--|

|               |   |            |          |            |          |          |          |           |          |           |
|---------------|---|------------|----------|------------|----------|----------|----------|-----------|----------|-----------|
| <b>I37006</b> | - | <b>124</b> | <b>M</b> | <b>162</b> | <b>A</b> | <b>B</b> | <b>N</b> | <b>LL</b> | <b>R</b> | <b>BU</b> |
|---------------|---|------------|----------|------------|----------|----------|----------|-----------|----------|-----------|

|                    |                           |                        |                                  |                  |                          |                                       |                           |                         |                                    |                                  |                        |
|--------------------|---------------------------|------------------------|----------------------------------|------------------|--------------------------|---------------------------------------|---------------------------|-------------------------|------------------------------------|----------------------------------|------------------------|
| <b>124=</b> 0,12µf | <b>M=</b> 20%<br>Standard | <b>162=</b><br>1600VDC | <b>A=</b> look Case<br>Dimension | <b>B=</b> 27,5mm | <b>N=</b> No<br>function | <b>LL=</b> Long<br>Lead<br>(Standard) | <b>R=</b> ROHS<br>Conform | <b>BU=</b> Bulk<br>Ware |                                    |                                  |                        |
|                    | <b>K=</b> 10%             |                        |                                  |                  |                          |                                       |                           |                         | <b>45=</b> Lead<br>Length<br>4,5mm | <b>N=</b> NON<br>ROHS<br>Conform | <b>TB=</b> Tape<br>Box |
|                    | <b>J=</b> 5%              |                        |                                  |                  |                          |                                       |                           |                         |                                    |                                  |                        |
|                    | <b>H=</b> 3%              |                        |                                  |                  |                          |                                       |                           |                         |                                    |                                  |                        |
|                    | <b>G=</b> 2%              |                        |                                  |                  |                          |                                       |                           |                         |                                    |                                  |                        |

**Metallized polypropylene film capacitor (Box-Type)**

Part No.: **I37006**

|       |        |      |        |        |        |           |           |          |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 15.05.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 3 from 4 |            |

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



|   |               |
|---|---------------|
| <b>Metallized polypropylene film capacitor (Box-Type)</b> |               |
| Part No.:   | <b>I37006</b> |
| Customer:   |               |

|       |        |      |        |        |        |           |           |          |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 15.05.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 4 from 4 |            |