




Material

Material: UL-certified nylon PA 66, 94V-2
 Temperature Range: min -40°C ~ max. +100°C
 Protection Degree: IP68 using with O-ring (NBR)
 Standard Color: Gray RAL7035, Black RAL9005 other colors are available on request

Technical Drawing

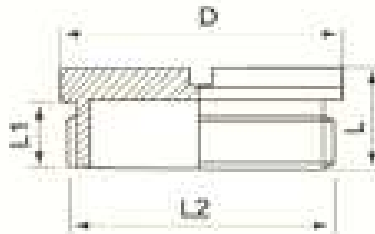

Cross Slit Blind Plug M-Thread	
Part No.:	231081
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2018
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Size	Thread Size	Thread O.D. L2 (mm)	Thread O.D. L1 (mm)	Main Body L (mm)	Cover D (mm)		
M12	M12x1,5	12	8,5	12,5	15		
M16	M16x1,5	16	8,5	13	19		
M18	M18x1,5	18	9	13	22		
M20	M20x1,5	20	9	13	25		
M22	M22x1,5	22	10,5	15	27		
M25	M25x1,5	25	10,5	15,5	29		
M27	M27x1,5	27	10,5	15,5	33		
M28	M28x1,5	28	10,5	15,5	33		
M32	M32x1,5	32	10,5	16	38		
M40	M40x1,5	40	11,5	18	46		
M50	M50x1,5	50	13,5	18	56		
M63	M63x1,5	63	14	19	68		

Ordering Information

Serie	Size	Color	ROHS	Packing		
231081	M12	7035	R	BU		

Look dimension table	7001 =Silver Gray	R = ROHS Conform N = NON ROHS	BU = Bulk-Ware into Polybag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Cross Slit Blind Plug M-Thread	
Part No.:	231081
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2018
APPD:	Join			FINISH	Shieh	Sheet	2 from 2