



R47007-110A

Features:

Size 2018
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly
Operating Temperature: -40°C ~ +85°C

Technical Specifications:

I_H Hold current maximum current device will pass without interruption in 20° C still air unless

I_T: Trip current: minimum current that will switch the device from low resistance, Resistance in 20°C still unless otherwise specified.

I_{max}: Maximum current device can VMAXIMAX 100 vcycles --- NO arcing or burning.

V_{max}: Maximum Voltage device can withstand without damage at rated current.

P_d: power dissipated from device when in the tripped state in 20°C still air unless otherwise specified.

R_{min}: Minimum resistance of device as supplied at 20°C unless otherwise specified.

R₁ max. Maximum device resistance in the nonstripped state 1 hour post reflow.

Thermal Derating chart-I H (A)

Range	Maximum ambient operating temperature (°C)								
	-.40	-.20	0	25	40	50	60	70	85
1100mA	1,71	1,52	1,32	1,10	0,94	0,84	0,74	0,64	0,5

Approval:



SMT POLY FUSE SIZE 2018

Part No.: **R47007-110A**

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	01.12.2014
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by S.Tiede



Technical Drawing and Informations

Dimensions

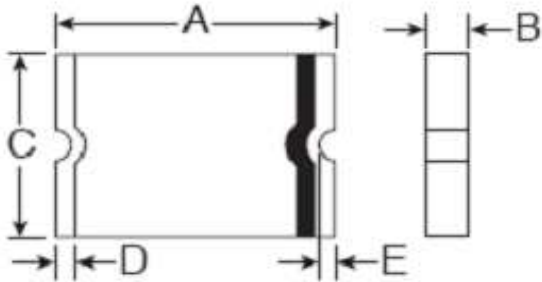


A (mm)		C (mm)		B (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.		Min.	
4,72	5,44	4,22	4,93	0,60	1,10	0,30		0,20	

Performance Rating:

Range	ICH	IT	V max	I m ax	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current (A)	Time (Sec.)	Ri min (Ω)		R1max (Ω)
	1100mA	1,1	2,2	33,0	100,0	1,1	8,0	0,4	0,6	

PAD Layout

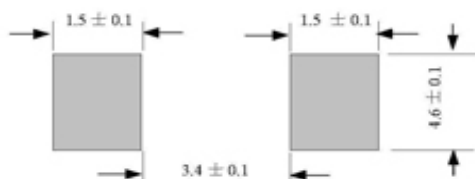

SMT POLY FUSE SIZE 2018

Part No.: **R47007-110A**

Customer:

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	01.12.2014
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by S.Tiede




Soldering Information

Lead Solder Performance



Lead free Solder Performance

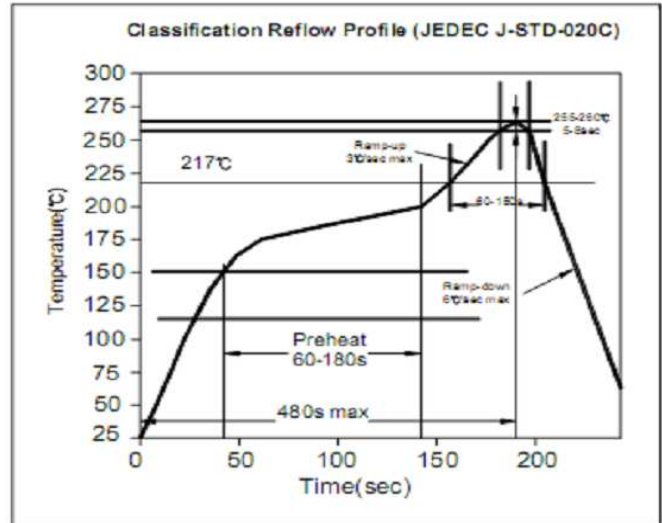

Ordering Informations:

Item-No. & Range	ROHS	Packing
------------------	------	---------

R47007-110A	R	TR
--------------------	----------	-----------

110 = 1,1A

R= ROHS	TR= Tape / Reel Standard)
N= Non ROHS	
BU= Bulk	

SMT POLY FUSE SIZE 2018	
Part No.:	R47007-110A
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	01.12.2014
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3

Copyright by S.Tiede