



DATA SHEET

Piezo Buzzer

Serie: Y11137

Piezo Buzzer	
Serie No.:	Y11137
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 5


EDCON-COMPONENTS




Technical Specifications

Rated Voltage:	12,0	(Vp-p)
Operating Voltage:	3,0 ~ 16,0	(Vp-p)
Oscillation Frequency:	4000 ±500	Hz
Current Consumption (mA/max) rated V.	8	mA max.
Sound Pressure Level :@ 10cm rated V.	83	min. dB
Operating Temperature:	-20~ +70	°C
Storage Temperature:	-30~ +80	°C
Dimensions:L x W x H	14,0 x 14,0 x 7,0	mm
Termination Material / Plated	Brass/ Tin Plated	
Material:		
Housing:	LCP / Black	
	SMD	
Packing Unit:	300	PCS


Frequency Chart

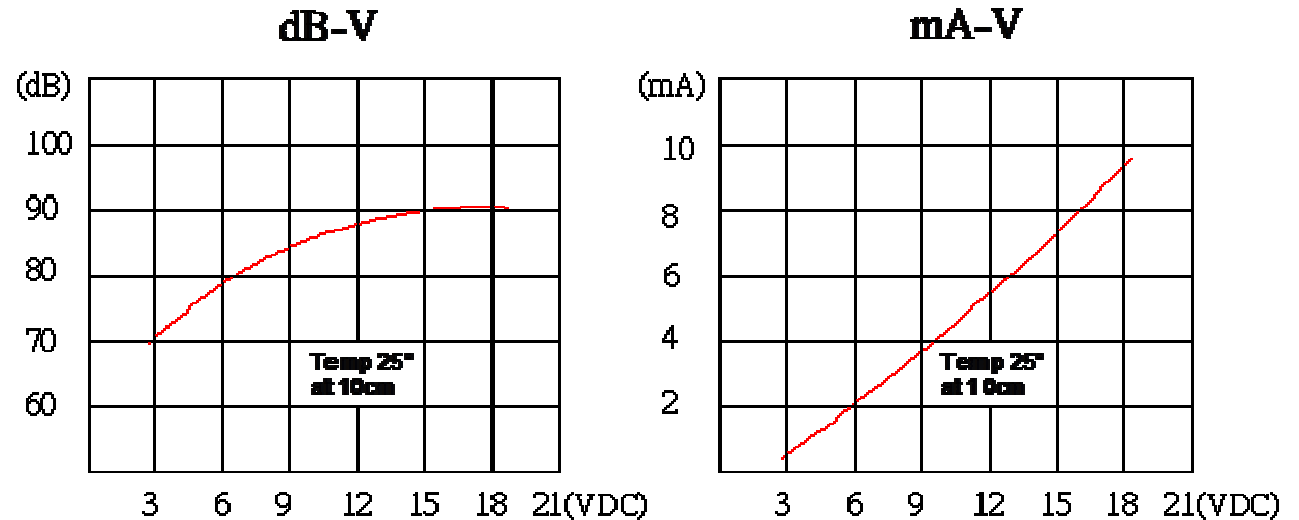

					Unspecified Tolerance (mm)					Piezo Buzzer	
					X.	X.x	X.xx	X.xxx	X.xxxx		
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018	Customer:	
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 5		



Technical Drawing

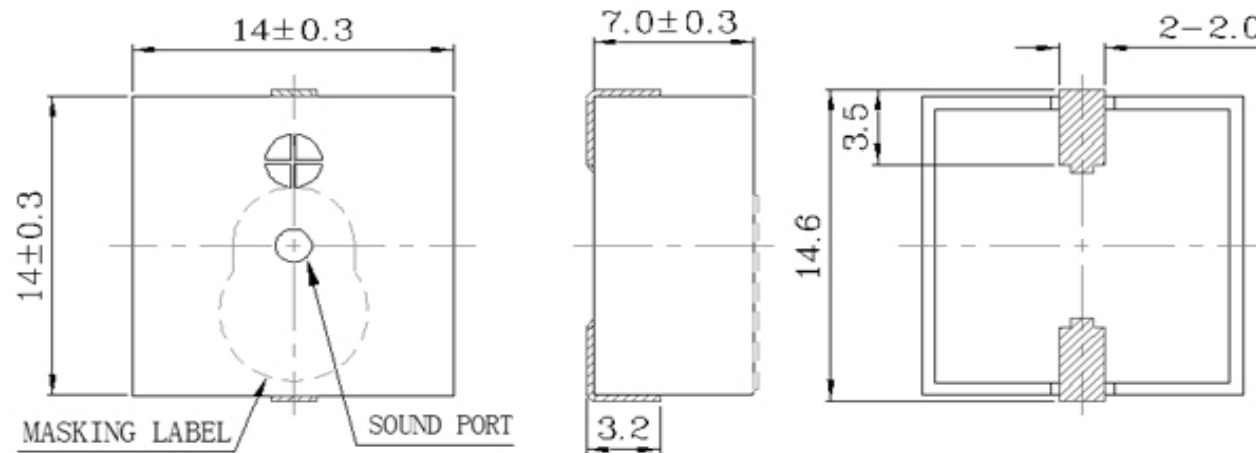

Piezo Buzzer	
Part No.:	Y11137
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 5

EDCON-COMPONENTS



Ordering Informations

Serie	Special function	Special function	Special function	ROHS	Packing Code					
-------	------------------	------------------	------------------	------	--------------	--	--	--	--	--

Y11137	N	N	N	R	TR					
--------	---	---	---	---	----	--	--	--	--	--

0= no special function	0= no special function	0= no special function	R= ROHS Conform	BU= Bulk Ware
			N= NON ROHS Conform	TU= TUBE Packing
				TY= TRAY Packing
				TR= TAPE REEL Packing
				IV= Individual Packing


Piezo Buzzer
Part No.: Y11137
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

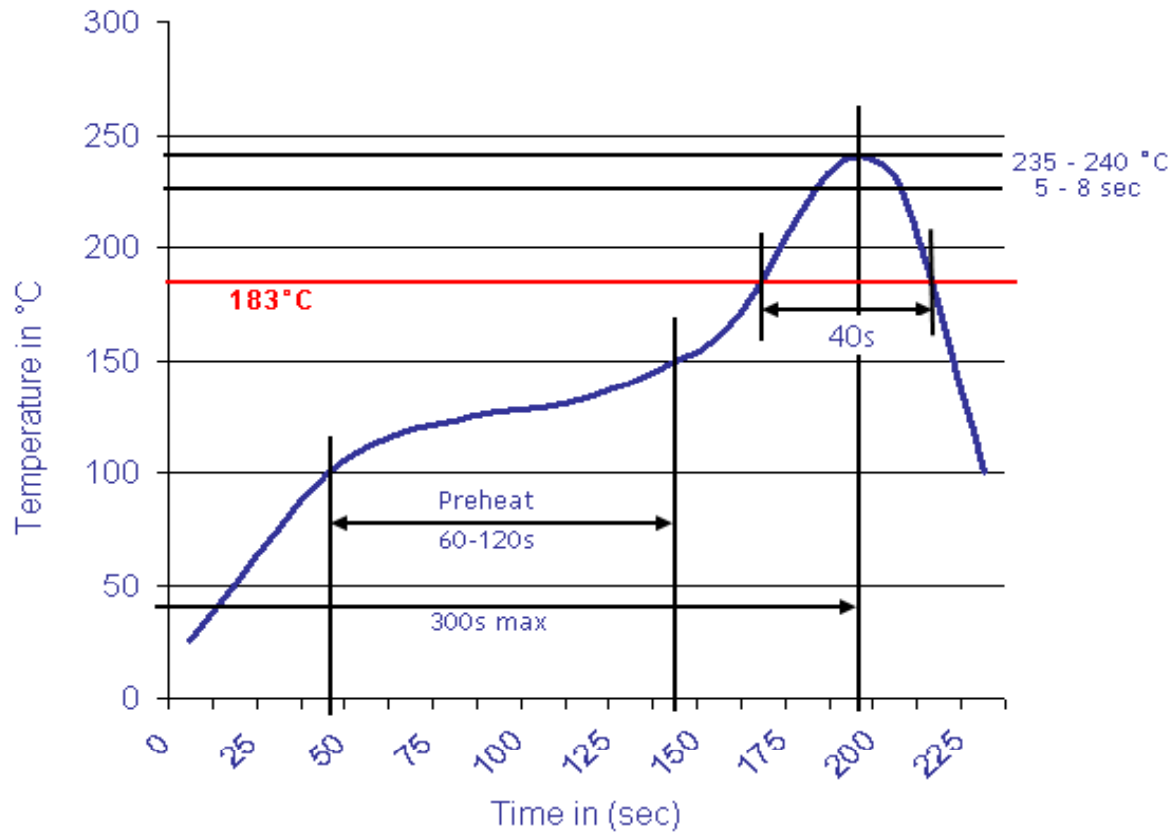

Piezo Buzzer	
Part No.:	Y11137
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		5 from 5