



# DATA SHEET

## Metallized polypropylene film capacitor Box-Type

### Serie: I39003

Code / Range **333= 0,033µf**

Code / Volt **631= 630VAC**

Width **13,0 mm**

Height **9,0 mm**

Thickness **4,0 mm**

Pitch **10,0 mm**

**Metallized polypropylene film  
capacitor Box-Type**

Serie No.: **I39003**


|       |        |      |        |        |        |           |           |          |            |           |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 16.05.2011 | Customer: |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 1 from 4 |            |           |

# EDCON-COMPONENTS




## Features

- Metallized polypropylene structure
- excellent electric property
- Plastic case (UL94V-0), Epoxy resin sealing

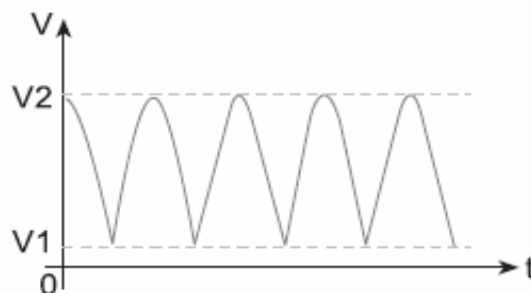

Here:  $V_1 \geq 0$ ,  $V_2 \leq U_R$ ,  $V_{rms} = (V_2 - V_1) \div \sqrt{2}$ ,  $i_{rms} = 2\pi f \times C \times (V_2 - V_1) \div \sqrt{2}$   
 $U_R$  is the rated voltage of the capacitor

## Dimensions

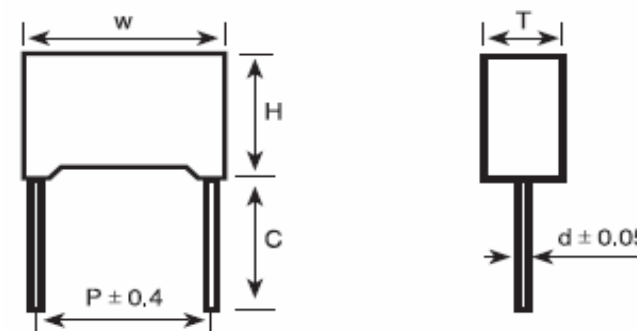

## Specifications

|                                   |   |                        |                     |
|-----------------------------------|---|------------------------|---------------------|
| Reference Standard                | GB/T 10190 (IEC 60384-16)   |                        |                     |
| Climatic Category                 | 40/105/56   |                        |                     |
| Rated Temperature                 | +85°C   |                        |                     |
| Operating Temperature Range       | -40°C ~ +105°C  |                        |                     |
|                                   | (+85°C to +105°C ; decreasing factor 1,25% per °C for $V_R$ (dc)) |                        |                     |
| Rated Voltage                     | 450VDC  | 520VDC                 | 630VDC              |
| Capacitance Range                 | 0,068~8,2µF   | 0,047~6,8µF            | 0,027~3,9µF         |
| Voltage Proof (Between Terminals) | 1.60 $U_R$ (5s)   |                        |                     |
| Capacitance Tolerance             | J=5% , K=10% , M=20%  |                        |                     |
| Dissipation Factor                | $\leq 10 \times 10^{-4}$ (1KHz, 20°C)                             |                        |                     |
| Insulation Resistance             | CR≤0,33µF   | ≥75x10 <sup>3</sup> MΩ | (20°C, 100V, 1min.) |
|                                   | CR≥0,33µF   | ≥30000s                |                     |
| Pitch Width                       | from 10,0mm ~ 27,5mm  |                        |                     |

## Case Dimension table

| Case Code | W ±0,4 (mm) | H ±0,4 (mm) | T ±0,4 (mm) | P (mm) |
|-----------|-------------|-------------|-------------|--------|
| <b>A</b>  | 13,0        | 9,0         | 4,0         | 10,0   |

C ±0,5 (mm)

Standard Length 18~26mm (Size by Size)

Short Lead 4,5mm

d ±0,05 (mm)

d = 0,6mm

**Metallized polypropylene film capacitor Box-Type**

Part No.: **I39003**

|       |        |      |        |        |        |           |           |      |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE | 16.05.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. |      | 2 from 4   |

Customer: email: info@edcon-components.com

[www.edcon-components.com](http://www.edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

| Serie | Range | Tolerance | Voltage | Case Code | Pitch Code | Lead Style | Lead Length C | ROHS | Packing Code |  |
|-------|-------|-----------|---------|-----------|------------|------------|---------------|------|--------------|--|
|-------|-------|-----------|---------|-----------|------------|------------|---------------|------|--------------|--|

|               |   |            |          |            |          |          |          |           |          |           |
|---------------|---|------------|----------|------------|----------|----------|----------|-----------|----------|-----------|
| <b>I39003</b> | - | <b>333</b> | <b>M</b> | <b>631</b> | <b>A</b> | <b>4</b> | <b>N</b> | <b>LL</b> | <b>R</b> | <b>BU</b> |
|---------------|---|------------|----------|------------|----------|----------|----------|-----------|----------|-----------|

|                      |                            |                        |                                   |                   |                           |  |                                   |                                   |
|----------------------|----------------------------|------------------------|-----------------------------------|-------------------|---------------------------|--|-----------------------------------|-----------------------------------|
| <b>333</b> = 0,033µf | <b>M</b> = 20%<br>Standard | <b>631</b> =<br>630VAC | <b>A</b> = look Case<br>Dimension | <b>4</b> = 10,0mm | <b>N</b> = No<br>function | <b>LL</b> = Long<br>Lead<br>(Standard) | <b>R</b> = ROHS<br>Conform        | <b>BU</b> = Bulk<br>Ware          |
|                      | <b>K</b> = 10%             |                        |                                   |                   |                           | <b>45</b> = Lead<br>Length<br>4,5mm    | <b>N</b> = NON<br>ROHS<br>Conform | <b>TB</b> = Tape<br>Box           |
|                      | <b>J</b> = 5%              |                        |                                   |                   |                           |  |                                   | <b>IV</b> = Individual<br>Package |

**Metallized polypropylene film capacitor Box-Type**

Part No.: **I39003**

|       |        |      |        |        |        |           |           |      |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE | 16.05.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. |      | 3 from 4   |

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



|   |               |
|---|---------------|
| <b>Metallized polypropylene film capacitor Box-Type</b> |               |
| Part No.:   | <b>I39003</b> |
| Customer:   |               |

|       |        |      |        |        |        |           |           |          |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 16.05.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 4 from 4 |            |